


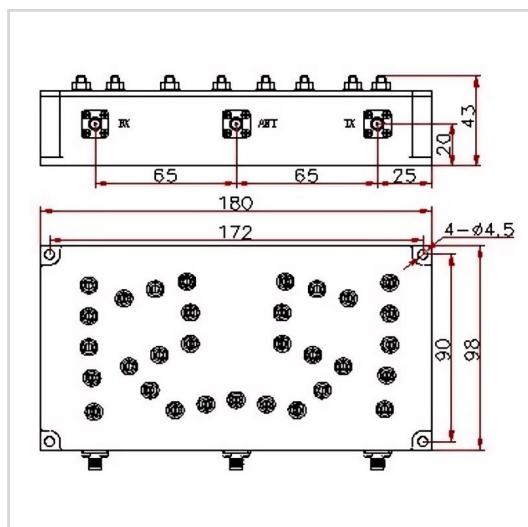

RF Solution offer a wide selection of RF Duplexer for global customers. DUP-1710M1805-75S is a RF Duplexer in Frequency Range of 1710~1880 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 1.5 dB, Ripple Max is 0.8 dB and Return Loss Min is 18 dB. The component has a good working performance and stability, it is ideal for handling a Power Rating of 50 W.

Product Details

Part Number	DUP-1710M1805-75S
Description	1710~1880 MHz RF Duplexer

General Parameters

Frequency Range	1710~1880 MHz
Insertion Loss Max	1.5 dB
Ripple Max	0.8 dB
Return Loss Min	18 dB
Power Rating	50 W
Rejection Min	5 dB / 10 dB / 50 dB / 55 dB / 80 dB / 85 dB
Bandwidth	75 MHz
VSWR Max	/
Impedance	50 Ω
Connector Type	SMA-F
Size	160*105*43 mm
Color	Black
Operating Temperature	-25~+60 °C
ROHS Compliant	Yes

Outline Drawing (mm)

