


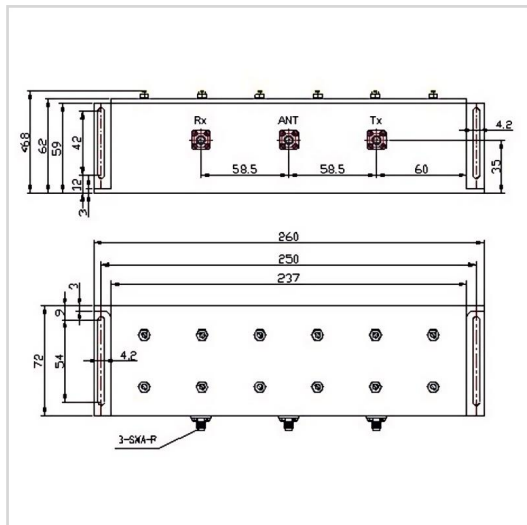

RF Solution offer a wide selection of RF Duplexer for global customers. DUP-403.5M413.5-05S is a RF Duplexer in Frequency Range of 403.5~418.5 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 1.8 dB / 2.0 dB, Ripple Max is 0.9 dB and Return Loss Min is /. The component has a good working performance and stability, it is ideal for handling a Power Rating of 60 W.

Product Details

Part Number	DUP-403.5M413.5-05S
Description	403.5~418.5 MHz RF Duplexer

General Parameters

Frequency Range	403.5~418.5 MHz
Insertion Loss Max	1.8 dB / 2.0 dB
Ripple Max	0.9 dB
Return Loss Min	/
Power Rating	60 W
Rejection Min	28 dB / 30 dB / 73 dB / 75 dB
Bandwidth	5 MHz
VSWR Max	1.25
Impedance	50 Ω
Connector Type	SMA-F
Size	260*72*68 mm
Color	Black
Operating Temperature	-20~+60 °C
ROHS Compliant	Yes

Outline Drawing (mm)

