

RF Solution offer a wide selection of Leaded Attenuator for global customers. RFTXXA-05AM0404-3 is a Leaded Attenuator in Frequency Range of DC~3.0 GHz. It is made of high quality materials under a high standard, the Attenuation Value of this product is ①01-10 dB②15,17,20 dB③25,30 dB, Attenuation Tolerance is ① ± 0.6 dB② ± 0.8 dB③ ± 1.0 dB and VSWR Max is 1.20. The component has a good working performance and stability, it is ideal for handling a Rated Power of 5 W.

Product Details



Part Number	RFTXXA-05AM0404-3
Description	DC~3.0 GHz Leaded Attenuator

General Parameters

Frequency Range	DC~3.0 GHz
Attenuation Value	①01-10 dB②15,17,20 dB③25,30 dB
Attenuation Tolerance	① ± 0.6 dB② ± 0.8 dB③ ± 1.0 dB
VSWR Max	1.20
Rated Power	5 W
Impedance	50 Ω
Temperature Coefficient Max	150 ppm/ $^{\circ}$ C
Size	Refer to the design drawing
Substrate Material	Al ₂ O ₃
Porcelain Hat Material	Al ₂ O ₃
Lead	99.99% Sterling Silver
Resistance Technology	Thick Film
Operating Temperature	-55 to +150 $^{\circ}$ C
ROHS Compliant	Yes



Outline Drawing (mm)

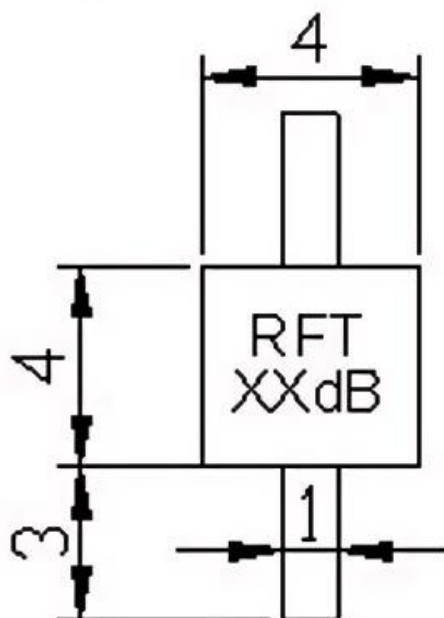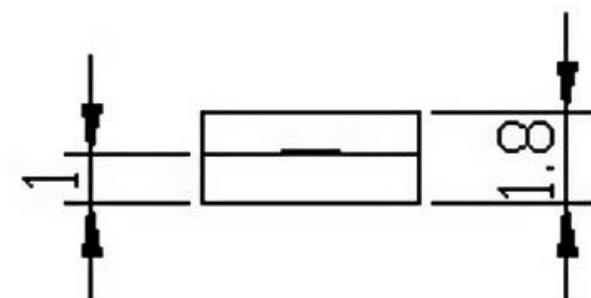

底部金属化银层