

RF Solution offer a wide selection of Drop in Isolator for global customers. WG6466H is a Drop in Isolator in Frequency Range of 30.0~40.0 MHz. It is made of high quality materials under a high standard, the Bandwidth Max of this product is 5%, Insertion Loss Max is 1.50~2.00 dB and Isolation Min is 18.0~20.0 dB. The component has a good working performance and stability, it is ideal for handling a Forward Power of 50 W.

## **Product Details**


Part Number	WG6466H
Description	30 to 40 MHz Drop in Isolator

## **General Parameters**

Frequency Range	30.0~40.0 MHz
Bandwidth Max	5%
Insertion Loss Max	1.50~2.00 dB
Isolation Min	18.0~20.0 dB
Forward Power	50 W
Reverse Power	20/50 W
VSWR Max	1.25~1.30
Impedance	50 Ω
Connector Type	I and the second
Size	64.0*66.0*22.0 mm
Weight	325 g
Operating Temperature	-30~+70 °C/-40~+85 °C
Storage Temperature	-50~+90 °C
ROHS Compliant	Yes



## **Outline Drawing (mm)**

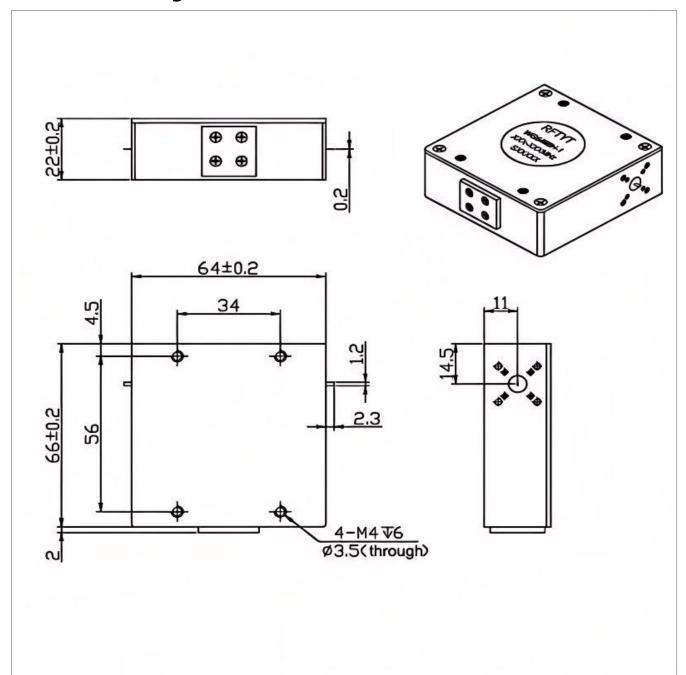

Web:www.solutionrf.com