


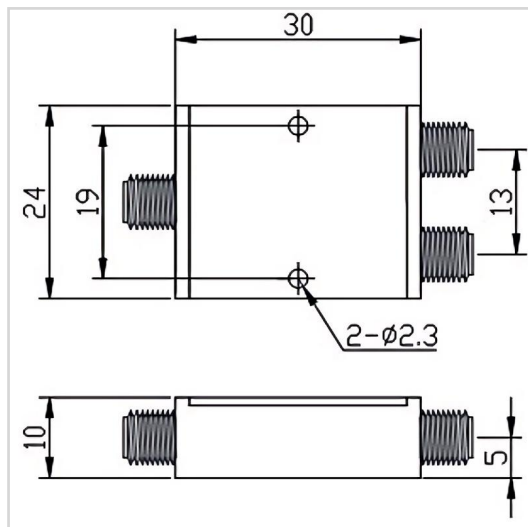

RF Solution offer a wide selection of 2 Ways Power Divider for global customers. PD02-F2430-S-6-18GHz is a 2 Ways Power Divider in Frequency Range of 6.0~18.0 GHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 0.8 dB, Isolation Min is 12 dB and Amplitude Unbalance is ± 0.3 dB. The component has a good working performance and stability, it is ideal for handling a Forward Power of 30 W.

Product Details

Part Number	PD02-F2430-S-6-18GHz
Description	6.0~18.0 GHz 2 Ways Power Divider

General Parameters

Frequency Range	6.0~18.0 GHz
Insertion Loss Max	0.8 dB
Isolation Min	12 dB
Amplitude Unbalance	± 0.3 dB
Forward Power	30 W
Reverse Power	1 W
VSWR Input Max	1.40
VSWR Output Max	1.40
Phase Unbalance	$\pm 6^\circ$
Impedance	50 Ω
Connector Type	SMA-F
Size	24*30*10 mm
Weight	/
Surface Finishing	Grey Painting



Operating Temperature	-45~+75 °C
ROHS Compliant	Yes

Outline Drawing (mm)

