


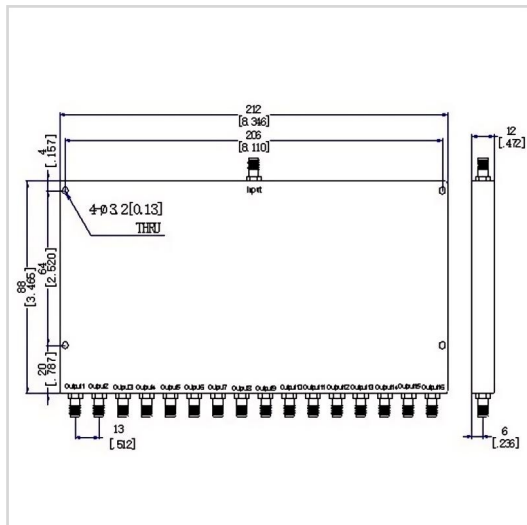

RF Solution offer a wide selection of 16 Ways Power Divider for global customers. PD16-F2188-S-890-960MHz is a 16 Ways Power Divider in Frequency Range of 890~960 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 1.0 dB, Isolation Min is 20 dB and Amplitude Unbalance is ± 0.5 dB. The component has a good working performance and stability, it is ideal for handling a Forward Power of 30 W.

Product Details

Part Number	PD16-F2188-S-890-960MHz
Description	890~960 MHz 16 Ways Power Divider

General Parameters

Frequency Range	890~960 MHz
Insertion Loss Max	1.0 dB
Isolation Min	20 dB
Amplitude Unbalance	± 0.5 dB
Forward Power	30 W
Reverse Power	2 W
VSWR Input Max	1.30
VSWR Output Max	1.25
Phase Unbalance	$\pm 6^\circ$
Impedance	50 Ω
Connector Type	SMA-F
Size	212*88*12 mm
Weight	/
Surface Finishing	Grey Painting



Operating Temperature	-35~+75 °C
ROHS Compliant	Yes

Outline Drawing (mm)

