

RF Solution offer a wide selection of Low Pass Filter for global customers. LPF-DCM1400A-S is a Low Pass Filter in Frequency Range of DC~1400 MHz. It is made of high quality materials under a high standard, the Insertion Loss Max of this product is 2.0 dB, Rejection Min is 40dB@1484-11000MHz and VSWR Max is 2.00. The component has a good working performance and stability, it is ideal for handling a Rated Power of 20 W.


Product Details


Part Number	LPF-DCM1400A-S
Description	DC~1400 MHz Low Pass Filter

General Parameters

Frequency Range	DC~1400 MHz
Insertion Loss Max	2.0 dB
Rejection Min	40dB@1484-11000MHz
VSWR Max	2.00
Rated Power	20 W
Impedance	50 Ω
Connector Type	SMA-F(K)
Size	94*40*27 mm
Weight	/
Surface Finishing	Black Painting
Operating Temperature	Ordinary Temperature
Storage Temperature	-55~+85 °C
ROHS Compliant	Yes

Outline Drawing (mm)



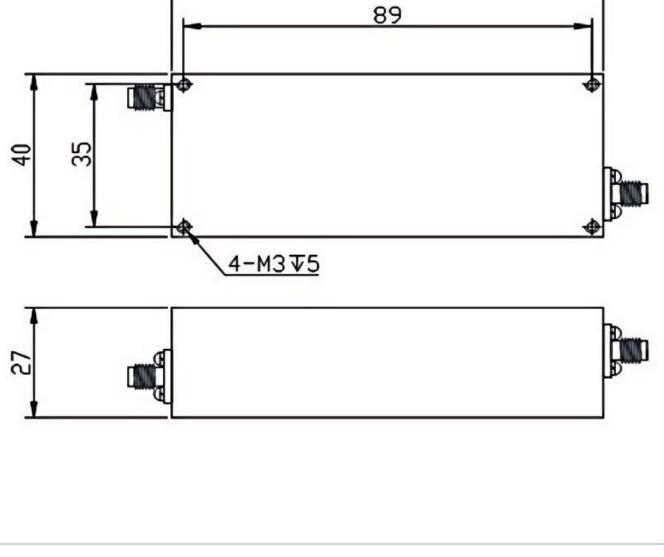

94

RF Solution

R / F

LPF-DCM1400A-S

DC~1400 MHz Low Pass Filter